


Premium Lithiumzelle

WS-NCM26.5Ah

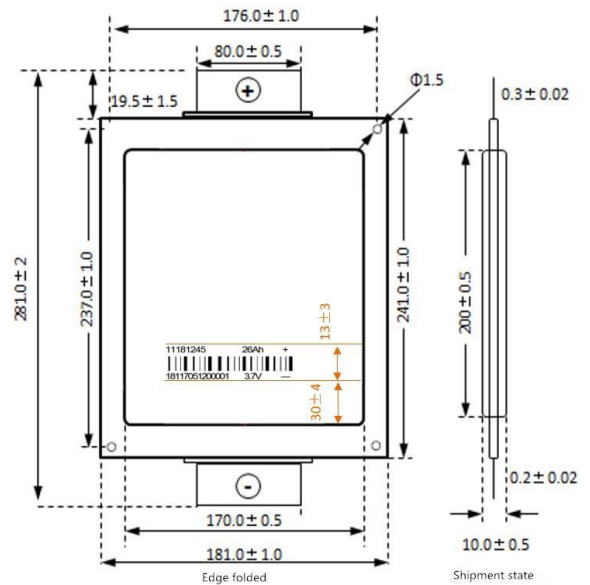

Capacity		26.5Ah @ 0.3C discharging
Nominal voltage		3.7V
Internal resistance		≤0.9mΩ
Energy density		135Wh/kg
Charging (CC-CV)	Charging current	3C continuous / 5C peak
	Charging upper limit Voltage	4.2V
Discharging	Discharging current	8C continuous / 12C peak
	Discharging cut-off voltage	3.0V
Operation temperature	Charging	-20°C - 45°C
	Discharging	-20°C - 55°C
Weight		0.75kg
Size		11x181x245mm
Shell material		Aluminium alloy
Bolt design		none
Certificates		UN38.3, MSDS